



SPECIFICATION

DESCRIPTION: 29" Android High-Brightness Advertising Screen

Product No: BR29XCB-N

Released Date: 2024.07.26

Revision: V1

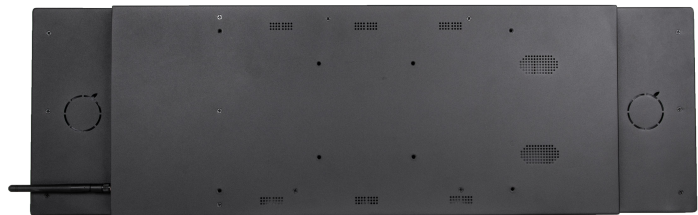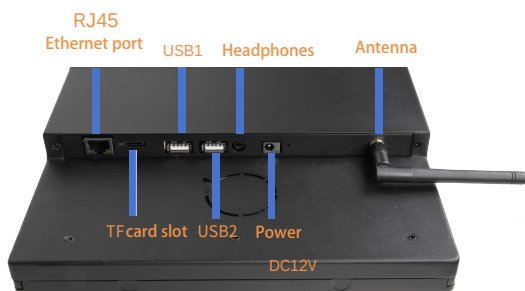

Company website: <https://www.brownopto.com/>

<https://www.blhlcd.com/>

Contact email: info@brownopto.com

WhatsApp: +8617748574559

- High-definition LCD display
- Supports 7x16 hours of operation
- Rich in interfaces
- Scheduled on/off

1. Product Parameter(Model: BR29XCB-N)

Category	Subcategory	Description
Display Screen	Size	29"
	Display Area	709.84(H) x 202.22(V) mm
	Resolution	1920(V) x 540(H)
	Brightness	700 cd/m ²
	Backlight Source	WLED
	Lifespan	50,000 hours
	Viewing Angle	178°(H) x 178°(V)
	Contrast Ratio	1200: 1
	Refresh Rate	60 Hz
	Color	16.7M, 72% NTSC
	Response Time	8ms
System	Processor	Rockchip RKPX30 Quad-core ARM Cortex-A35
	Memory	Standard 1GB
	Internal Storage	8GB eMMC (Options: 8G/16G/32G/64G)
	External Storage	Supports up to 64GB TF card
	Network/Bluetooth	Supports 2.4G wireless network WiFi and Bluetooth 4.0
	Interfaces	1x RJ45 port (100M), 1x USB 2.0, 1x USB 1.0 (OTG), 1x TF card slot, 1x power port (DC 12V for power supply), 1x headphone jack
	Operating System	Android 8.1
Power	Power Consumption	≤30W
	Voltage	DC 12V
Chassis and Packaging	Dimensions	720.8mm x 226.5mm x 40.2mm
	Net Weight	≤4.4KG
	Packaging Size (2 units per box)	830 x 210 x 300mm
	Gross Weight (2 units per box)	9.35KG
Environment	Working Environment	Temperature: 0°C ~ 50°C Humidity: 10% ~ 85% Atmospheric Pressure: 86KPa ~ 104KPa
	Storage Environment	Temperature: -20°C ~ 60°C Humidity: 5% ~ 95% Atmospheric Pressure: 86KPa ~ 104KPa
Certification	CE, FCC	Available
Accessories	Warranty	1 year
	Included Items	Adapter, Wall Mount Bracket
Optional	Information Release System	Supports various formats of display including images, text, videos, web pages; multi-zone visual editing, template management, distributed remote management, remote updates, scheduled on/off, multi-account allocation management, up to 50 permission settings, system monitoring management with real-time status updates, terminal daily log query statistics, can

